
Manage Multiple DPL Data Sources in Scenario Editor


We can add multiple DPL files in Test Designer IDE. Once the user adds one of the DPL files in Data tab User can still add other DPL files if any with the help of API that is already available for Hash DPL and JS DPL.

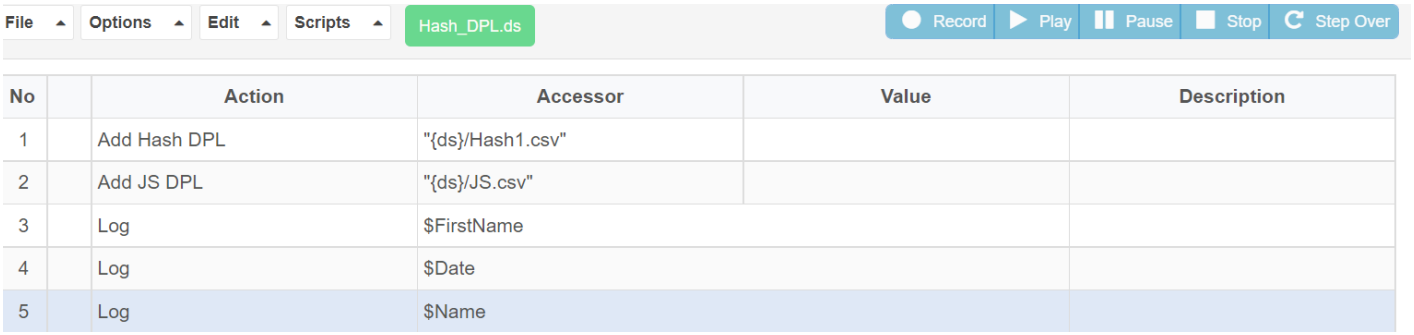

No		Action	Accessor	Value	Description
1		Add Hash DPL	"{ds}/Hash1.csv"		
2		Add JS DPL	"{ds}/JS.csv"		
3		Log	$FirstName		
4		Log	$Date		
5		Log	$Name		

With the help of the above API called “Add Hash DPL” and “Add JS DPL”. User can add multiple DPL’s in the IDE.

Below is the screenshot for the successful execution of the same

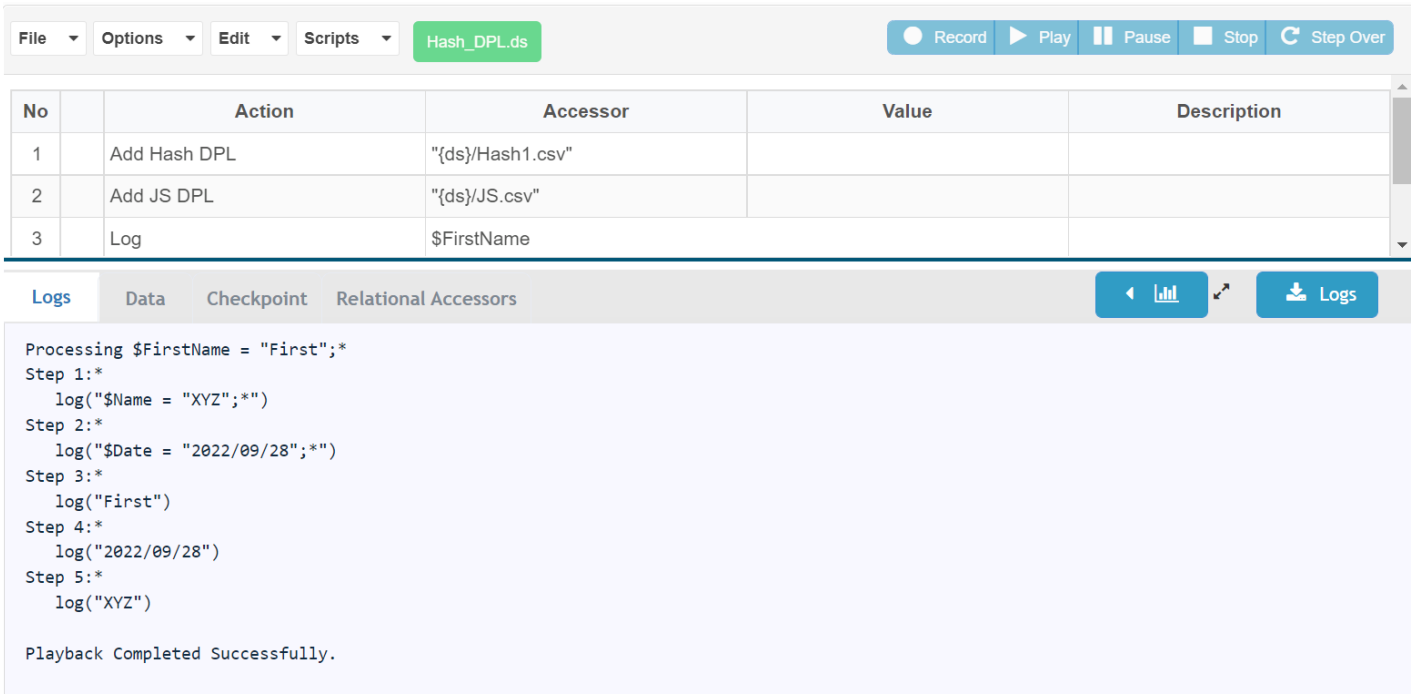

No		Action	Accessor	Value	Description
1		Add Hash DPL	"{ds}/Hash1.csv"		
2		Add JS DPL	"{ds}/JS.csv"		
3		Log	$FirstName		

If you have any feedback on this topic, please contact us at documentation@appvance.ai

Last updated: October 16, 2026

Revision #5
Created 2026-07-31 15:40:05 UTC by Admin
Updated 2026-10-16 17:57:25 UTC by mmora